



FX5311 VIA Eden V4 Small System

With VGA, 2S, 2LAN, 2USB and Audio




Features

- Fanless and low power consumption design
- VIA CPU (Eden-V4 1GHz, 128KB L2 Cache Inside) and System Chipset (CX700M)
- One 200-Pin SoDIMM socket with 1GB DDR2 RAM
- Support High Definition Audio
- 10/100 Base-T Ethernet Ports (*2)
- Support CRT
- USB V2.0 Ports (*2)
- One CompactFlash Card Type I/II socket
- One 2.5" SATA HDD Space
- One RS232 and One RS232/422/485

Specifications

- CPU Board:** VIA Eden-V4 1GHz Low-power CPU board with 1GB DDR2 RAM
- I/O Outlets:** 1 CRT connector (UMA 128MB max.)
2 RJ45 connectors (Realtek RTL8100C Chipset)
2 USB connectors
1 RS232 and 1 RS232/422/485 connectors
2 Audio connectors (Mic/Line-In & Line-Out)
1 DC jack and 1 terminal block 2-Pin connectors
- Storage Bay:** 1 2.5" SATA HDD space
1 CompactFlash Card Type I/II socket
- Power Req.:** DC 12~24 Input, 16VA maximum
- LED Indicators:** 2 Power LEDs, 2 HDD LEDs, 2 LAN LEDs
- Dimensions (W*D*H):** 145 x 102 x 50 mm
- Operating Temp.:** 0°C ~ 50°C (32°F ~ 122°F)
- Compliances** CE/ FCC/ RoHS

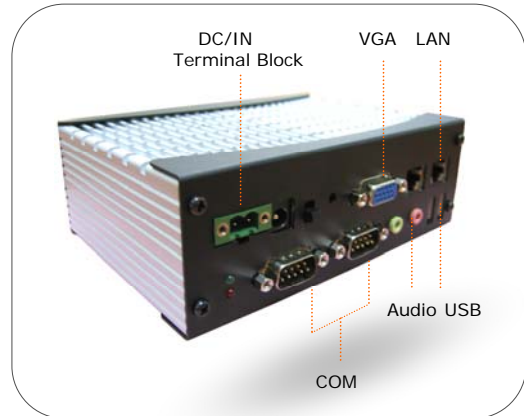

Optional Item

FX5311K1 – VESA Mount (75 x 75 mm Only)

Order Information

Model	Description	Verified OS
FX5311	VIA Eden-V4 1GHz Small System w/2S, VGA, 2LAN, 2USB & Audio	Windows 2000/XP, WinCE.NET, XP Embedded, Linux



FabiaTech Corp.

TEL:886-2-22789586 FAX:886-2-22789575
4F-3, No.18, Lane 609, Chung-Hsin Rd., Sec.5, San-Chung City, Taipei Hsien, Taiwan, R.O.C.

www.fabiatech.com